


FAN DIAMETER SIZE OPTIONS

Fan Blades: 20" 24" 30"

Total Fan: 26" 32" 38"

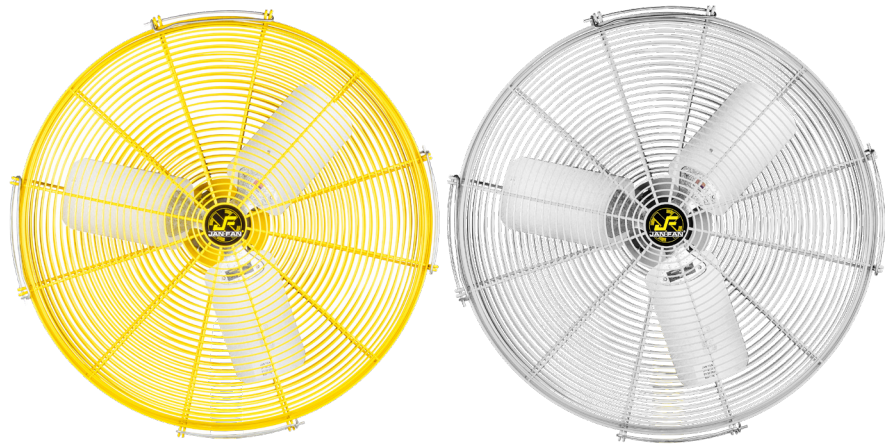

FAN COLOR OPTIONS

Safety Yellow, Silver

MOUNTING OPTIONS

- C-Channel
- I-Beam
- Wall/Ceiling
- Articulating Arm
- Pedestal
- Rugged Mobile Fan
- Adapter Kit



FAN DIAMETER SIZE OPTIONS

Motor Power: 1/4 HP
 Input Power: 1PH 115V 60HZ, 1PH 230V 50HZ
 Max Current at Full Speed: 2.4 Amps
 2 Speed Control: Rocker Switch or Pull Chain
 High Air Velocity: 500 ft/min at 35 ft distance
 100 ft/min at 125 ft distance



SAFETY & ADVANCED FEATURES

- Energy Savings Module
- Modular design for part interchangeability
- Positive locking guard with quick release for safe access
- Spring-type steel blades with front hub
- Safety cable for over-head mounted fans
- Wheel kit and light mount options


CERTIFICATIONS & WARRANTY

Fan Blades: ETL Certified
 Total Fan: Full 5-Year Warranty


Mount Option	Mode Number	Product Description	Length	Width	Height	CFM	DB	RPM (H/L)	Blade Dia.	Guard Blade Dia.	Power Cord Length	Weight (LB)
I-BEAM	#JF-BMF20-2SP	20" - 2 SPEED I-BEAM MOUNT FAN COMPLETE W/ PULL CHAIN	49.75"	24.6"	24.6"	4,250	60.2	1100/900	20"	24.6"	18'	49
	#JF-BMF20-DCS	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-BMF24-2SP	24" - 2 SPEED I-BEAM MOUNT FAN COMPLETE W/ PULL CHAIN	50.77"	30.6"	30.6"	6,210	64	1100/900	24"	30.6"	18'	56
	#JF-BMF24-DCS	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-BMF30-2SP	30" - 2 SPEED I-BEAM MOUNT FAN COMPLETE W/ PULL CHAIN	49.75"	36.6"	36.6"	7,710	70.9	1100/900	30"	36.6"	18'	62
	#JF-BMF30-DCS	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
C-CHANNEL	#JF-CCM20-2SP	20" - 2 SPEED C-CHANNEL MOUNT FAN COMPLETE W/PULL CHAIN	24.6"	24.6"	49.75"	4,250	60.2	1100/900	20"	24.6"	18'	49
	#JF-CCM20-DCP	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-CCM24-2SP	24" - 2 SPEED C-CHANNEL MOUNT FAN COMPLETE W/PULL CHAIN	30.6"	30.6"	50.77"	6,210	64	1100/900	24"	30.6"	18'	56
	#JF-CCM24-DCP	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-CCM30-2SP	30" - 2 SPEED C-CHANNEL MOUNT FAN COMPLETE W/PULL CHAIN	36.6"	36.6"	49.75"	7,710	70.9	1100/900	30"	36.6"	18'	62
	#JF-CCM30-DCP	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
ADAPTOR KIT	#JF-AKF20-2SP	20" - 2 SPEED ADAPTOR KIT MOUNT FAN COMPLETE W/PULL CHAIN	13.75"	24.6"	24.6"	4,250	60.2	1100/900	20"	24.6"	18'	39
	#JF-AKF20-DCP	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-AKF24-2SP	24" - 2 SPEED ADAPTOR KIT MOUNT FAN COMPLETE W/PULL CHAIN	13.75"	30.6"	30.6"	6,210	64	1100/900	24"	30.6"	18'	46
	#JF-AKF24-DCP	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-AKF30-2SP	30" - 2 SPEED ADAPTOR KIT MOUNT FAN COMPLETE W/PULL CHAIN	13.75"	36.6"	36.6"	7,710	70.9	1100/900	30"	36.6"	18'	52
	#JF-AKF30-DCP	30" - AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
WALL / CEILING	#JF-WCM20-2SP	20" - 2 SPEED WALL OR CEILING MOUNT FAN COMPLETE W/PULL CHAIN	32.25"	24.6"	24.6"	4,250	60.2	1100/900	20"	24.6"	18'	43
	#JF-WCM20-DCS	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-WCM24-2SP	24" - 2 SPEED WALL OR CEILING MOUNT FAN COMPLETE W/PULL CHAIN	32.25"	30.6"	30.6"	6,210	64	1100/900	24"	30.6"	18'	50
	#JF-WCM24-DCS	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-WCM30-2SP	30" - 2 SPEED WALL OR CEILING MOUNT FAN COMPLETE W/PULL CHAIN	32.25"	36.6"	36.6"	7,710	70.9	1100/900	30"	36.6"	18'	56
	#JF-WCM30-DCS	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
PEDESTAL	#JF-PF20-2SP	20" - 2 SPEED PEDESTAL FAN COMPLETE W/PULL CHAIN	32.25"	24.6"	72.30"	4,250	60.2	1100/900	20"	24.6"	18'	71
	#JF-PF20-DCS	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-PF24-2SP	24" - 2 SPEED PEDESTAL FAN COMPLETE W/PULL CHAIN	32.25"	30.6"	75.30"	6,210	64	1100/900	24"	30.6"	18'	78
	#JF-PF24-DCS	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										
	#JF-PF30-2SP	30" - 2 SPEED PEDESTAL FAN COMPLETE W/PULL CHAIN	32.25"	36.6"	78.3"	7,710	70.9	1100/900	30"	36.6"	18'	84
	#JF-PF30-DCS	AS ABOVE BUT WITH 2 SPEED DROP CORD SWITCH										

AIR VELOCITY PATTERNS IN FT./MIN

20
PEDESTAL FAN

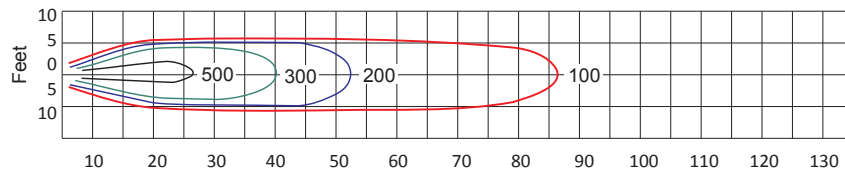

24
PEDESTAL FAN

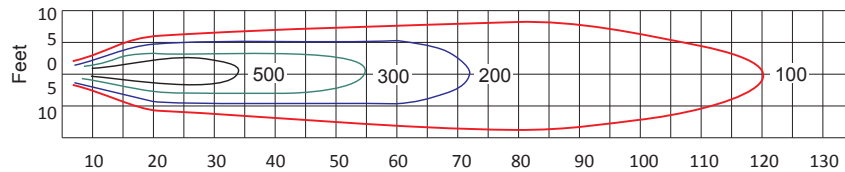

30
PEDESTAL FAN

